

# HIGHPOWER™ AC1200 WI-FI® RANGE EXTENDER

PLUG-IN | DUAL BAND | 600mW | GIGABIT

The REC22A expands the range of any standard 802.11a/b/g/n/ac Wi-Fi network by repeating the signal (2.4GHz and 5GHz) from a Wi-Fi router and redistributing it in a new, extended location. The REC22A is equipped with a total of eight amplifiers, including four 2.4/5GHz amplifiers and four low noise amplifiers. The amplifiers combined with a high gain external antenna and an internal high gain antenna provide up to 10,000 sq ft of additional Wi-Fi coverage. The Range Extender features AC1200 Wi-Fi speeds to provide enough bandwidth for the most demanding networks. It is built with one gigabit wired port for connecting and bridging an additional network device, such as a PC or TV, to your Wi-Fi network. The REC22A works with all brands of standard single or dual band Wi-Fi routers and service provider gateways. Unleash your iPads, tablets and smartphones with the most powerful, fastest, plug-in, universal Wi-Fi range extender available.



UP TO 10,000 SQ FT

## KEY FEATURES



### Long Range Wi-Fi

Extend the range of any single or dual band Wi-Fi router by up to 10,000 sq ft\*



### Eliminate Wi-Fi Dead Spots

Achieve maximum range with 8 high power amplifiers and a high gain antenna



### Ultra-Fast AC1200 Wi-Fi

Supports next-gen AC1200 Wi-Fi for 300Mbps on 2.4GHz and 867Mbps on 5GHz



### Simultaneous Dual Band Wi-Fi

Repeat both 2.4GHz and 5GHz signals simultaneously for maximum bandwidth



### BoostBand™ Technology

Streamline Wi-Fi traffic and increase speeds by up to 2X\*



### Guest Networks & User Access

Create up to 8 networks for guests and restrict access to specific users



### Wi-Fi Coverage Control

Adjust the distance of your wireless network for more control



### AirPlay®, AirPrint™, & Home Sharing

Works with all Apple networking features



### Gigabit Network Bridge

Connect one additional wired device, like a Smart TV, at gigabit speeds


## HOW IT WORKS

The REC22A expands the range of any standard Wi-Fi router by repeating the signal (2.4GHz and/or 5GHz) and redistributing it in a new, extended location.




## HIGH POWER TECHNOLOGY

High Power Amplifiers & High Gain Antennas Boost Wi-Fi Performance

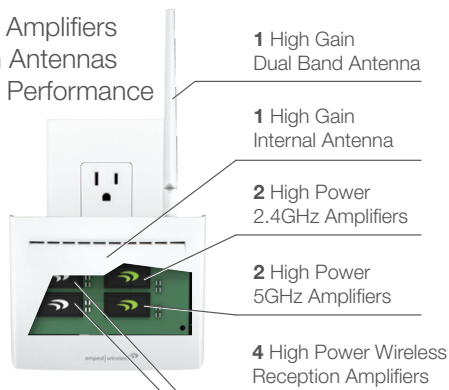

## AMPED WIRELESS DIFFERENCE

Amplifiers	REC22A	Up to 600mW
	Standard Wi-Fi Devices	50mW
Antennas	REC22A	Up to 3dBi
	Standard Wi-Fi Devices	<1dBi

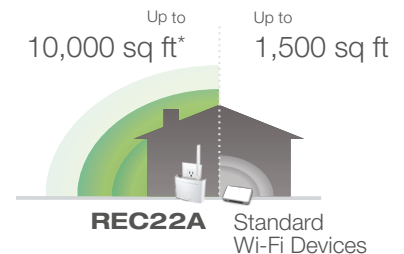

mW = Milliwatt (Output Power Measurement) dBi = Decibel (Antenna Gain Measurement)

PRODUCT COMPARISON

	AC600 Dual Band Compact Range Extender <b>REC15A</b>	AC1200 Dual Band Plug-In Range Extender <b>REC22A</b>	AC1200 Dual Band Range Extender <b>REA20V2</b>	AC1750 Dual Band Plug-In Range Extender <b>REC33A</b>	AC1750 Dual Band Range Extender <b>RE1750A</b>
<b>SPEED PERFORMANCE</b>					
AC600 Dual Band N+AC Speeds	●				
AC1200 Dual Band N+AC Speeds		●	●		
AC1750 Dual Band N+AC Speeds				●	●
<b>OUTPUT POWER / COVERAGE</b>					
Up to 500mW / 6,500 sq ft	●				
Up to 600mW / 10,000 sq ft		●		●	
Up to 800mW / 12,000 sq ft			●		●
<b>ANTENNAS</b>					
High Gain Antennas	1	2	2	3	3
Detachable Antennas	1	1	2	1	3
Dual Band	●	●	●	●	●
<b>KEY FEATURES</b>					
Discreet Plug-In Design	●	●		●	
Universal: Works with All Routers*	●	●	●	●	●
Wired Ports	1	1	5	1	5
Gigabit Ports & Power Processor		●	●	●	●
Simultaneous Dual Band Less Interference	●	●	●	●	●
USB Storage Support			●		●
Signal Strength LED		●		●	
Qualcomm® VIVE™ 11ac Technology		●	●	●	●

SIMPLE SETUP

1. Connect your tablet, smartphone, or PC to the Range Extender
2. Access the Setup Menu
3. Scan for and select your network

 Step-by-Step Installation Video included

BOOSTBAND TECHNOLOGY

Increase the overall speed and performance of your extended network by streamlining dual band network traffic through a single Wi-Fi frequency band between the Router and the Range Extender.



TECHNICAL SPECIFICATIONS

- Wireless Standard: 802.11a/b/g/n/ac
- Frequency Band: 2.4GHz / 5GHz
- Wireless Speed: AC1200
- Security: WEP, WPA, WPA2, WPA Mixed, WPS
- User Access Controls
- Adjustable Wireless Coverage
- Amplifiers: 2 x 2.4GHz Amplifiers  
2 x 5GHz Amplifiers  
4 x Low Noise Amplifiers
- Antennas: 1 x Detachable High Gain Dual Band Antenna  
1 x Internal High Gain Dual Band Antennas
- Port: 1 x RJ-45 Gigabit Port
- Warranty: 1 Year

SETUP REQUIREMENTS

- Wireless 802.11a/b/g/n or ac 2.4GHz or 5GHz Network
- Computer, Tablet or Smartphone with Wi-Fi access and a web browser

PRODUCT CONTENTS

- High Power AC1200 Plug-In Wi-Fi Range Extender
- Detachable High Gain Dual Band Antenna
- Setup Guide
- CD: User's Guide & Installation Video

Specifications are subject to change without notice.

\* Range specifications are based on performance test results. Actual performance may vary due to differences in operating environments, building materials and wireless obstructions. Performance may increase or decrease over the stated specification. Wireless coverage claims are used only as a reference and are not guaranteed as each wireless network is uniquely different. Maximum wireless signal rate derived from IEEE 802.11 standard specifications. Actual data throughput may vary as a result of network conditions and environmental factors. AC1200 wireless signal speeds achieved when connecting to other AC1200 capable Wi-Fi devices. Output power specifications are based on the maximum possible radio output power plus antenna gain.

May not work with non-standard Wi-Fi routers or routers with altered firmware or proprietary firmware, such as those from third party sources or some Internet service providers. May not work with routers that do not comply with IEEE or Wi-Fi standards.

AirPlay, AirPrint, Home Sharing are either registered trademarks or trademarks of Apple Inc. Wi-Fi, Wi-Fi Protected Setup, and WPA2 are either registered trademarks or trademarks of the Wi-Fi Alliance.

2.4GHz | 5GHz SIMULTANEOUS

WORKS WITH 802.11 a/b/g/n **AC**

Designed by Amped Wireless in the USA

Amped Wireless  
13089 Peyton Dr. #C307  
Chino Hills, CA 91709

www.ampedwireless.com  
1(888) 573-8830